

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
18 July 2002 (18.07.2002)


PCT

(10) International Publication Number  
**WO 02/054932 A2**

- (51) International Patent Classification<sup>7</sup>: **A61B** (74) Agents: **EITAN, PEARL, LATZER & CO-HEN-ZEDEK** et al.; 2 Gav Yam Center, 7 Shenkar Street, 46725 Herzlia (IL).
- (21) International Application Number: **PCT/IL02/00042**
- (22) International Filing Date: 16 January 2002 (16.01.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 60/261,188 16 January 2001 (16.01.2001) **US**
- (71) Applicant (for all designated States except US): **GIVEN IMAGING LTD.** [IL/IL]; 2 HaCarmel St., Industrial Park, 20692 Yotneam (IL).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **MERON, Gavriel** [IL/IL]; 21 Weizman Street, 49556 Kfar Ganim, Petach Tikva (IL). **GLUKHOVSKY, Arkady** [IL/IL]; 24/5 Hanuriot Street, 36790 Nesher (IL).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**  
— without international search report and to be republished upon receipt of that report

[Continued on next page]

(54) Title: **SYSTEM AND METHOD FOR WIDE FIELD IMAGING OF BODY LUMENS**

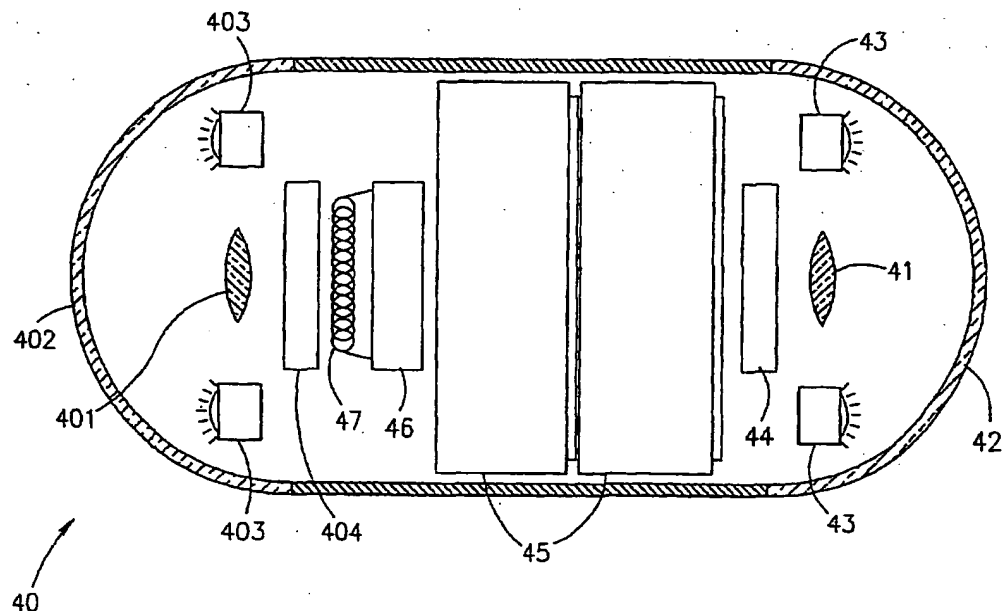

(57) Abstract: A system and method for wide angle imaging of body lumens are provided. The system comprises at least one imager and an optical system having a plurality of optical paths for imaging images from within the body lumen onto the at least one imager. The system may be incorporated in or attached onto a device that is configured to be inserted into and pass through body lumens such as an endoscope, a needle or a swallowable capsule.



*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## SYSTEM AND METHOD FOR WIDE FIELD IMAGING OF BODY LUMENS

5

### FIELD OF THE INVENTION

The present invention relates to the field of in vivo imaging. More specifically, the present invention relates to a system and method for wide angle viewing or imaging of body lumens.

10

### BACKGROUND OF THE INVENTION

15

In vivo imaging greatly enhances a practitioner's ability to safely and easily view internal body features and occurrences with minimal intrusion. A body lumen, typically a voluminous cavity, is most effectively viewed or imaged when a wide angle of viewing or imaging is obtained.

Wide angle optics usually employ a single optical path which includes a complicated set of alternating differently shaped mirrors and lenses. Some methods for photographing a wide field involve alignment of film and imaging devices to cover multiple fields of view.

20

To date, there exists no simple method or system for wide angle viewing or imaging of body lumens.

## SUMMARY OF THE INVENTION

The present invention provides a system and method for wide angle imaging of body lumens. A wide angle of imaging is obtained by employing a plurality of optical paths coordinated to cover a wider angle than that covered by a  
5 single optical path.

An optical path, in the present invention, is the course followed by light rays incident on an endo - luminal site and remitted from it onto an imager, such as a CMOS imager. Thus, an optical path, according to an embodiment of the invention, includes at least an endo- luminal site and an imager. The optical path  
10 may further include means for collecting and directing light rays, such as lenses and mirrors, for collecting the remitted light and directing and/or focusing it upon the imager.

Each optical path comprises at least one imager however, the same imager can be part of several different optical paths, where remitted light from several  
15 different endo - luminal sites is directed from the different sites onto the same imager through different optical paths.

The system according to an embodiment of the invention comprises at least one imager and an optical system having a plurality of optical paths for imaging images from within the body lumen onto the at least one imager. In one embodiment  
20 the system is inserted into the body lumen for obtaining a wide angle of view of the body lumen. The obtained images may be stored in the imager or in an additional memory device. The system may further include at least one transmitter for

transmitting signals to a receiving system, such that the images can be received and analyzed in real time. The receiving system may include a recording/processing device for subsequent analysis.

The system, according to an embodiment of the invention, may be incorporated in or attached on to a device that is configured for being inserted into  
5 body lumens such as an endoscope, a needle, stent or a device that can pass through the gastrointestinal (GI) tract.

In one embodiment of the invention the system comprises a single imager and a single transmitter and a plurality of optical paths. In this embodiment a  
10 plurality of narrow field images are obtained on the single imager and are then combined into a single image having a wider angle field than any of the narrow field images.

In another embodiment of the invention the system comprises a plurality of imagers and at least one transmitter transmitting in a single channel of transmission  
15 or in multiple channels. In this embodiment the imagers are positioned such that they capture images of different portions of the body lumen. A combined image of the images captured by the different imagers shows all the individually imaged portions, thereby covering a wide field.

For example, a wide field of view of any section of the GI tract can be  
20 obtained by encapsulating the system of the invention in a device capable of passing through the entire GI tract, such as a capsule similar to the swallowable capsule described in US Patent Number 5,604,531 or WO 01/65995. US Patent Number

5,604,531 and WO 01/65995, which are assigned to the common assignee of the present application, are hereby incorporated by reference.

One imager and its optical path can be positioned at one end of the device and another imager and its optical path at another end of the device. Alternatively,  
5 imagers and their optical paths can be positioned in a circle facing outwards on the circumference of the device.

In yet another embodiment of the invention the system comprises a plurality of imagers, each having an optical path, wherein each imager and its optical path is partitioned off from its neighboring imagers. In this embodiment  
10 interference between imager operations is greatly reduced.

The present invention further provides a device for imaging a body lumen. The device, according to an embodiment of the invention, comprises the system of the invention. In one embodiment the device can be inserted into the GI tract, for viewing specific regions of the GI tract, such as an endoscope, or for viewing the  
15 entire GI tract, such as a swallowable capsule.

The method for obtaining a wide field image of a body lumen, according to an embodiment of the invention, comprises the following steps: 1. inserting into a body lumen a system comprising at least one imager for obtaining images from within the body lumen and a plurality of optical paths; 2. obtaining a plurality of  
20 images from within the body lumen. The method may include a further step of transmitting signals from the imager, a further step of receiving the transmitted

signals and a further step of combining the plurality of images into a single image.  
The obtained images may be stored in a memory device for further analysis.

### BRIEF DESCRIPTION OF THE DRAWINGS

5       The present invention will be understood and appreciated more fully from  
the following detailed description taken in conjunction with the appended drawings  
in which:

Figure 1A is a schematic longitudinal cross section view of a device  
comprising the system comprising a single imager, according to an embodiment of  
10   the invention;

Figure 1B is a schematic radial cross section view of the device shown in  
Fig. 1A;

Figure 1C is a more detailed view of the imager shown in Fig. 1B;

Figure 2A is a schematic longitudinal cross section view of the system  
15   comprising five optical paths, according to an embodiment of the invention;

Figure 2B is a schematic radial cross section view of the system shown in  
Fig. 2A;

Figure 3 is a schematic presentation of the combining of four images to a  
single combined image, according to an embodiment of the invention;

20       Figure 4 is a schematic longitudinal cross section view of a device  
comprising the system that comprises front and rear optical paths, according to an  
embodiment of the invention;

Figure 5 is a schematic radial cross section view of the system comprising a plurality of imagers, according to an embodiment of the invention;

Figure 6 is a schematic longitudinal cross section view of a device comprising the system comprising a plurality of optical paths partitioned off from  
5 each other, according to an embodiment of the invention; and

Figure 7 is a schematic radial cross section view of a device comprising a system that comprises a plurality of optical paths partitioned off from each other, according to an embodiment of the invention.



## DETAILED DESCRIPTION OF THE INVENTION

The system and method, according to an embodiment of the present invention, enable wide angle imaging of body lumens. The wide angle of view is obtained by imaging partially overlapping or non overlapping portions of the body lumen, using a plurality of optical paths. The images of the body lumen portions may be combined to a single image.

The imaging of different portions of the body lumen, which may or may not be simultaneous, is done by employing a plurality of optical paths, each of which covers a different portion of the body lumen. In accordance with different embodiments of the invention, and as will be shown in the figures, light rays may be collimated through the different optical paths to a single imager or to a plurality of imagers. The different optical paths may or may not be separated from each other by a physical partition.

A separate transmitter and channel of transmission may be assigned to each imager for simultaneous transmitting of signals from the body lumen.

Alternatively, the output of several imagers may be combined over a single transmitter and channel of transmission e.g. by using different carrier frequencies. According to one embodiment, the combination of information from the different imagers over the single channel may be done either by selecting a bit from a different imager each time, thus transmitting all the images almost simultaneously, or by transmitting image after image.

The system according to an embodiment of the invention comprises a plurality of optical paths and at least one imager for endo-luminal imaging. In one embodiment the system may be incorporated in or attached to any device or probe suitable for being inserted into a body lumen, such as at the tip of a needle, on the  
5 inserted end of an endoscope or in a swallowable capsule. In one embodiment the system is positioned behind an optical window.

In the following description, various aspects of the present invention will be described. For purposes of explanation, specific configurations and details are set forth in order to provide a thorough understanding of the present invention.  
10 However, it will also be apparent to one skilled in the art that the present invention may be practiced without the specific details presented herein. Furthermore, well known features may be omitted or simplified in order not to obscure the present invention.

A swallowable capsule comprising a video camera for imaging the GI tract  
15 is described in the above mentioned US Patent Number 5,604,531 and WO 01/65995. A capsule that may comprise similar elements to the capsules described in US Patent Number 5,604,531 and WO 01/65995 but that comprises a plurality of optical paths, is schematically shown in Fig. 1. The capsule 10 comprises illumination sources 13, such as light emitting diodes (LEDs), a system 19 including  
20 lenses 11 and mirrors 18, all positioned behind optical window 12, an imager 14, such as a CMOS imager for obtaining images from within the GI tract, power source 15, such as a battery, which provides power to the entirety of the electrical

elements of the capsule and transmitter 16 and antenna 17 for transmitting video signals from imager 14. Signals may be transmitted using various digital or analog modulation techniques. For example transmission of a digital image over a radio channel may use an FSK (Frequency Shift Keying) modulation technique.

5           Externally to the body there is a receiver (not shown) for receiving the signals transferred by transmitter 16 and antenna 17.

Light rays from illumination sources 13 illuminate the GI tract inner wall. Remitted light rays are collected by lenses 11 and 11' and directed by mirrors 18 and 18' to imager 14. Lens 11 gathers illumination rays at angle  $\alpha$ , obtaining an  
10 image field that is defined by angle  $\alpha$ . Lens 11' gathers illumination rays at angle  $\alpha_1$ , obtaining an image field that is defined by angle  $\alpha_1$ . Thus, by using both lenses 11 and 11', an image field defined by angle  $(\alpha + \alpha_1)$  can be covered.

Two more optical paths can be situated in parallel to the paths which include lens 11 and mirror 18 and lens 11' and mirror 18' so that an image field  
15 twice as wide can be covered. In this manner, a wide field in different planes can be imaged, as further shown in Fig. 1B.

Fig. 1B is a schematic radial cross section illustration of a system comprising four optical paths 11, 11', 11'' and 11''' in all of which remitted light is directed to a single imager 14. The four fields 101, 101', 101'' and 101''' covered  
20 by the four optical paths 11, 11', 11'' and 11''' are imaged onto imager 14 coincidentally. As shown in Fig. 1C each of the fields 101, 101', 101'' and 101'''

takes up a quarter of the imager 14 face area (for example, 128X128 pixels of the 256X256 pixels area of the imager).

The optical schemes illustrated in Figs. 1A and 1B provide a viewing angle that is larger than  $180^0$ , in the longitudinal plane (Fig 1A) and  $360^0$  imaging in a plane perpendicular to the longitudinal plane.(Fig 1B).

Similarly, the system of the invention may comprise five optical paths, as shown in Fig. 2A. Fig. 2A schematically illustrates the system comprising an optical path which includes lens 21 and mirror 28, an optical path which includes lens 21' and mirror 28' and an optical path which includes lens 25. Together with two more optical paths that are situated in parallel to the paths that include lens 21 and mirror 28 and lens 21' and mirror 28', there are five optical paths covering a wide image field.

Fig. 2B is a schematic radial cross section illustration of a system comprising five optical paths (only four optical paths 21, 21', 21'' and 21''' are shown) in which remitted light is directed to a single imager 24. The five fields 201, 201', 201'', 201''' and 205 covered by the five optical paths are imaged onto imager 24 coincidentally.

The five optical path scheme shown in Figs. 2A and 2B provides optionally better overlapping between margins of neighboring optical path fields than the four optical path scheme and thus enables better reconstruction of a single combined image.

The system illustrated in Figs. 2A and 2B can be incorporated in or attached to device 20 which may be an endoscope, a needle, a stent, a capsule designed to pass through the GI tract, etc.

The components of the system according to an embodiment of the invention may be specifically designed for the system, or the system may utilized some components from other systems that operate in body lumens, thus economically taking advantage of existing components. For example, the system of the invention may be incorporated into or affixed onto medical devices meant for being inserted into body lumens, such as needles, stents, endoscopes or capsules designed to pass through the entire GI tract. For example, endoscopes utilize a light source and sometimes an imaging device while operating. Thus, the system of the invention can be incorporated into an endoscope and utilize the endoscope's light source and imaging device.

Combining multiple images to a single image is schematically shown in Fig. 3. The four different fields 301, 301', 301'' and 301''' imaged on imager 34 are combined into a single image 31 which is a wide angle image of the lumen being viewed. The obtained images may be presented separately for a physician's examination, or may be combined and presented as a single wide-angle image.

As shown in Figs. 1B and 2B there can be an overlap between the fields obtained by the different optical paths. Thus, part of the fields 301, 301', 301'' and 301''' may be the same. For example, points A1, A2, A3 and A4 all represent the same pixel, while point B represents a pixel unique to field 301'.

The combination into the single image 31 may be performed, for example, by applying an algorithm which assigns each image point (pixel) in the different fields 301, 301', 301'' and 301''' to another point (pixel) of the single image 31. Thus, points A1, A2, A3 and A4 will be assigned to point A in image 31 and point  
5 B will be assigned to point B1 in image 31.

The four different fields 301, 301', 301'' and 301''' may be combined by a combiner in the receiving system which is adapted to combine a plurality of images into a single image. The operation of combining images into a single image usually requires significant processing effort and computing resources. Therefore this  
10 operation is usually performed off-line (after receiving the image transmitted from the imager) in an external recording/processing device (not shown).

Another embodiment of the invention is schematically illustrated in Fig. 4, in which a longitudinal cross section of device 40 is schematically shown. Device 40 comprises two optical domes 42 and 402 behind which are situated illumination  
15 sources 43 and 403 and optical paths 41 and 401, respectively. In optical paths 41 and 401 remitted light is directed to imagers 44 and 404 respectively. The device 40 further comprises power source 45, which provides power to the entirety of electrical elements of the device, and transmitter 46 and antenna 47 for transmitting video signals from the imagers 44 and 404. The system of the invention, as operable  
20 in device 40, is capable of simultaneously obtaining images of the body lumen, for example, the GI tract, from two ends of the device. For example, device 40 may be a cylindrical capsule having a front end and a rear end, which is capable of passing

the entire GI tract. The system in a cylindrical capsule can image the GI tract in the front and in the rear of the capsule.

In one embodiment, device 40 is inserted into a body lumen, for example a patient's GI tract. The patient may swallow the device and it will start its journey in  
5 the patient's GI tract. Some parts of this journey are through voluminous areas of the GI tract, for example, the stomach or the large intestine, in which the device 40 is not always oriented "head first", with one end of the device leading and the other end following. In the wider areas of the GI tract the device 40 may tumble in a rotating motion through the GI tract. In this case, simultaneous imaging of the front  
10 and rear of the device 40 is advantageous in imaging a wide field of the lumen. Also, there is an advantage in viewing the same site from different angles (as imaged by the front imager e.g., 44 and by the rear imager e.g., 404), especially, for example, if the site is enclosed in a fold of the GI tract.

Both images obtained by imagers 44 and 404 may be transmitted by  
15 transmitter 46 serially or simultaneously, as described above. Optionally, each imager may be assigned a separate transmitter and channel for transmitting the images. The two images (front and rear) can be displayed separately or as a single combined image.

In another embodiment of the invention a plurality of optical paths and a  
20 plurality of imagers are employed. The system schematically illustrated in Fig. 5 comprises a plurality of optical paths, for example 52 and 52' having a plurality of imagers, for example 54 and 54'. In each optical path 52 and 52', which may

include lenses and mirrors for gathering and collimating remitted light, the remitted light is directed to a separate imager 54 and 54' respectively, such that different portions of the body lumen are imaged on different imagers. Optical paths 52 and 52' may be situated in capsule 50, which is designed to pass through and image the entire GI tract.

The different images, which may be acquired simultaneously, can be transferred to a receiving system over a single channel or over a multi channel link, as described above.

In a single channel link the concurrently acquired images are transferred serially and a multiplexer may be used to effect transmission. A single channel link operates at a higher frequency than a multi channel link. In a multi channel link the images can be transferred in parallel and at a lower frequency and thus have larger bandwidths. The multi channel link may thus be more suitable for transferring larger amounts of data. Also, the lower frequency multi channel link may be more suitable for use with a capsule 50 designed to pass through and image the entire GI tract in which the frequency used for transmitting images from the GI tract is usually limited to the 200 - 500 MHz range.

Another embodiment of the invention is schematically illustrated in Figs. 6 and 7. In Fig. 6 a longitudinal cross section of device 60 is schematically illustrated. Device 60 comprises a plurality of optical paths 62, 62' and 62'' in which remitted light is directed to imagers 64, 64' and 64'' respectively. Each optical path and respective imager are partitioned off from the other optical paths and imagers by



partitions 601, 602 and 603, and each partitioned optical path has its own illumination source 63, 63' and 63''. In one embodiment the device 60 comprises an optical dome which may extend over most of the device, covering the optical paths 62, 62' and 62'', or the device may include an optical dome covering optical path 62' and optical windows on the sides of the device covering optical paths 62 and 62''. Partitions 601, 602 and 603 may be made of opaque material and may serve to prevent interference between the operation of the different imagers and their associated illumination sources.

A radial cross section of a device comprising a plurality of optical paths partitioned from each other is shown in Fig. 7. The device 70 may be cylindrical shaped, similar to a swallowable capsule or to an endoscope tip, or it may be a transparent sphere shaped device or it may be of any shape suitable for being inserted into and passing through a body lumen.

In device 70 each of the imagers 74 faces a portion of the body lumen at  $90^{\circ}$  to its neighboring imager. The body lumen is illuminated by illumination sources 73 and remitted light is directed onto imager 74 through optical path 72. In this manner a complete  $360^{\circ}$  field can be imaged. The mechanical dividers, partitions 701, serve to avoid having interference between the different imagers 74 and illumination sources 73.

It will be appreciated by persons skilled in the art that the present invention is not limited by what has been particularly shown and described herein above. Rather the scope of the invention is defined by the claims which follow.

## CLAIMS

1. A system for wide field imaging of body lumens comprising  
5                   at least one imager; and  
                  an optical system having a plurality of optical paths for imaging  
                  images from within the body lumen onto the at least one imager.
2. The system according to claim 1 and further comprising a memory  
                  device for storing images.
- 10   3. The system according to claim 1 further comprising at least one  
                  transmitter for transmitting signals from the imager.
4. The system according to claim 3 further comprising a receiving system  
                  for receiving the signals.
5. The system according to claim 4 wherein the receiving system comprises  
15                   a recording and/or processing device.
6. The system according to claim 5 wherein the receiving system comprises  
                  a combiner adapted to combine a plurality of images into a single image.
7. The system according to claim 1 comprising a single imager and a single  
                  transmitter.

8. The system according to claim 1 comprising a plurality of imagers and a single transmitter, said plurality of imagers each having a respective optical path.
9. The system according to claim 3 wherein the transmitter transmits in a single channel.
10. The system according to claim 3 wherein the transmitter transmits in multiple channels.
11. The system according to claim 8 wherein the imagers and their respective optical paths are partitioned off from each other.
12. A device for imaging a body lumen comprising a system which comprises at least one imager and an optical system having a plurality of optical paths for imaging images from within the body lumen onto the at least one imager.
13. The device according to claim 12 further comprising an optical window.
14. The device according to claim 12 wherein the imager further comprises a memory device for storing images.
15. The device according to claim 12 wherein the system further comprises at least one transmitter for transmitting signals from the imager.
16. The device according to claim 15 wherein the system further comprises a receiving system for receiving the signals from the transmitter.

17. The device according to claim 16 wherein the receiving system comprises a recording/processing device.
18. The device according to claim 17 wherein the receiving system comprises a combiner adapted to combine a plurality of images into a  
5 single image.
19. The device according to claim 12 wherein the system comprises a single imager and a single transmitter.
20. The device according to claim 12 wherein the system comprises a plurality of imagers and a single transmitter, said plurality of imagers  
10 each having a respective optical path.
21. The device according to claim 15 wherein the transmitter transmits in a single channel.
22. The device according to claim 15 wherein the transmitter transmits in multiple channels.
- 15 23. The device according to claim 20 wherein the imagers and their respective optical paths are partitioned off from each other.
24. The device according to claim 12 wherein the device is configured for being inserted into a body lumen.
25. The device according to claim 24 wherein the body lumen is the  
20 gastrointestinal tract.

26. A capsule comprising an optical window and a system which comprises at least one imager and an optical system having a plurality of optical paths for imaging images from within the body lumen onto the at least one imager.
- 5 27. The capsule according to claim 26 wherein the system is located behind the optical window.
28. An endoscope comprising a system which comprises at least one imager and an optical system having a plurality of optical paths for imaging images from within the body lumen onto the at least one imager.
- 10 29. A method for wide field imaging of body lumens comprising the steps of:
- inserting into a body lumen a system comprising at least one imager and an optical system having a plurality of optical paths for imaging images from within the body lumen onto the at least one imager; and
- 15                      obtaining a plurality of images from within the body lumen from the plurality of optical paths.
30. The method according to claim 29 further comprising the step of combining the plurality of images into a single image.
31. The method according to claim 29 further comprising the step of storing
- 20                      the obtained images in a memory device for further analysis.

32. The method according to claim 29 further comprising the step of transmitting signals from the imager.
33. The method according to claim 32 further comprising the step of receiving the transmitted signals.
- 5 34. The method according to claim 32 wherein the signals are transmitted over a single channel.
35. The method according to claim 32 wherein the signals are transmitted over multiple channels.
36. The method according to claim 29 wherein inserting the system into a  
10 body lumen is by swallowing.
37. A method for wide field imaging of the gastrointestinal tract comprising the steps of:
- inserting into the gastrointestinal tract a device comprising a system which comprises at least one imager and an optical system having a  
15 plurality of optical paths for imaging images from within the body lumen onto the at least one imager; and
- obtaining a plurality of images from within the gastrointestinal tract from the plurality of optical paths.
38. The method according to claim 37 wherein the step of inserting into the  
20 gastrointestinal tract a device is achieved by swallowing the device.

39. A method for wide field imaging of the gastrointestinal tract comprising the steps of:

inserting into the gastrointestinal tract an endoscope comprising a system which comprises at least one imager and an optical system having a plurality of optical paths for imaging images from within the body lumen onto the at least one imager; and

obtaining a plurality of images from within the gastrointestinal tract from the plurality of optical paths.

40. A transmitter for transmitting signals from within a body lumen, said transmitter operable with a system comprising at least one imager and an optical system having a plurality of optical paths for imaging images from within the body lumen onto the at least one imager.

41. The transmitter according to claim 40 wherein the transmitting channel is a radio channel.

42. The transmitter according to claim 40 wherein the signals are digital signals.

43. The transmitter according to claim 40 wherein the signals are analog signals.

44. The transmitter according to claim 40 having a single transmitting channel.

45. The transmitter according to claim 44 further comprising a multiplexer.

46. The transmitter according to claim 40 having multiple transmitting channels.
47. The transmitter according to claim 46 transmitting in the 200 - 500 MHz range.
- 5 48. A receiving system for receiving signals from a transmitter transmitting signals from within a body lumen, said receiving system operable with a system comprising at least one imager and an optical system having a plurality of optical paths for imaging images from within the body lumen onto the at least one imager.
- 10 49. The receiving system according to claim 48 comprising a recording and/or processing device.
50. The receiving system according to claim 48 further comprising a combiner adapted for combining a plurality of images into a single image.



1/8

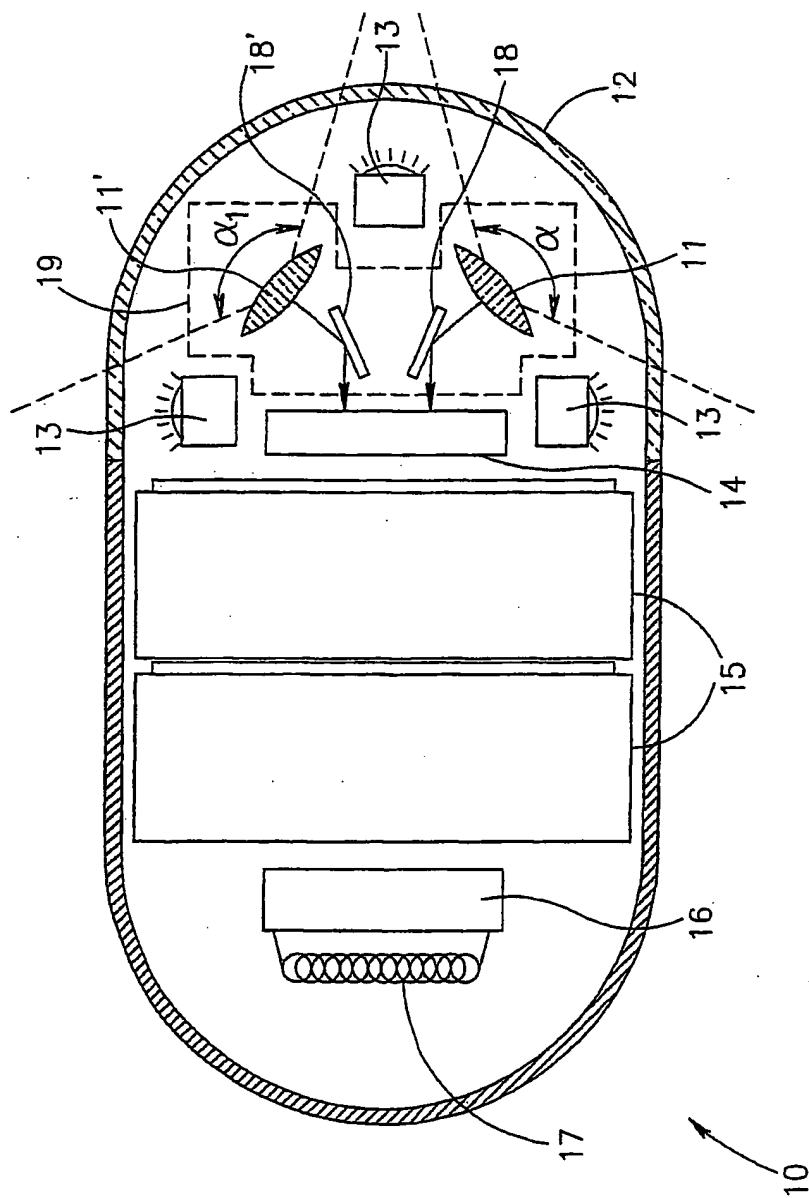
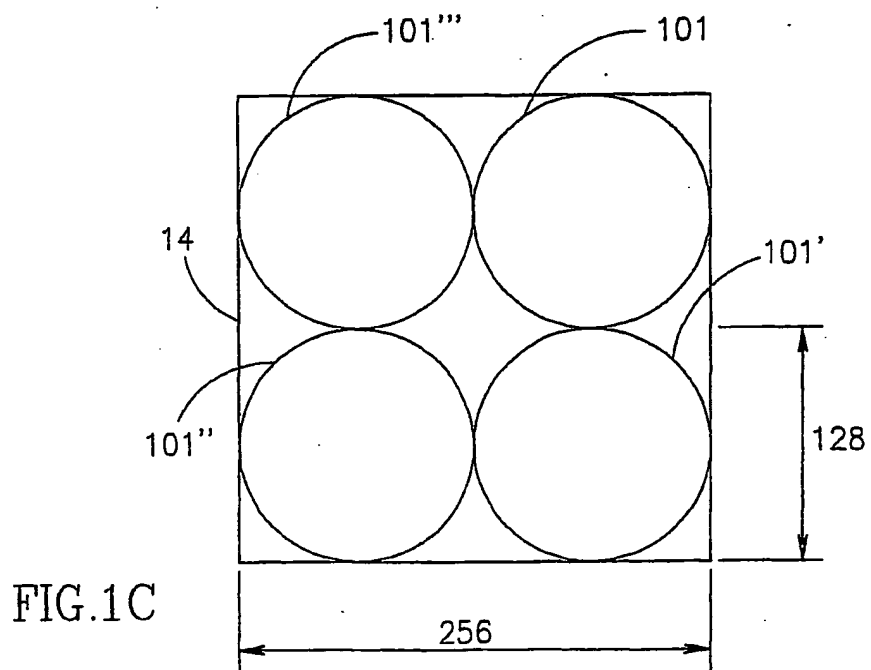
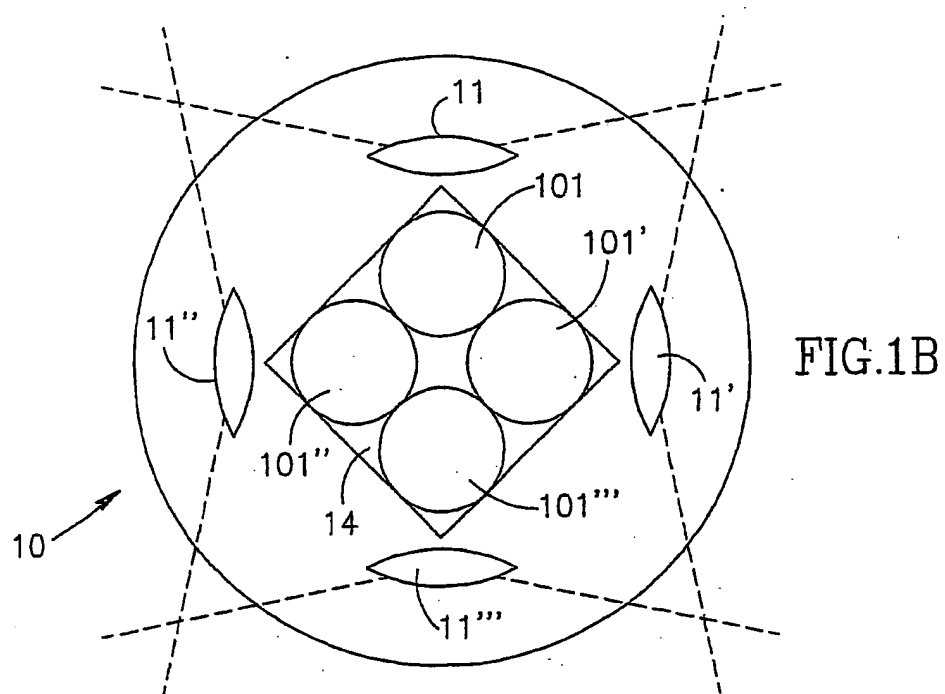


FIG.1A

2/8



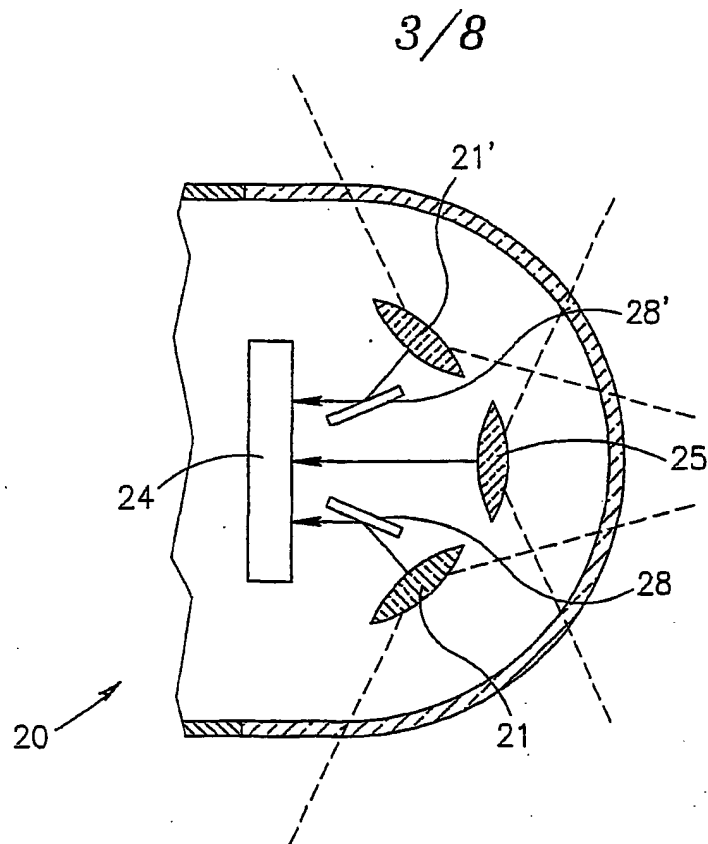


FIG. 2A

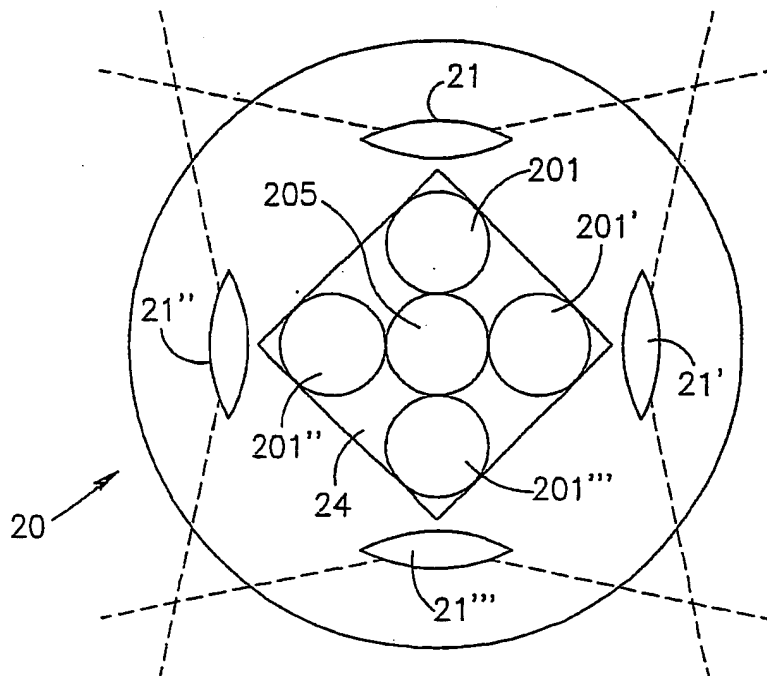


FIG. 2B

4/8

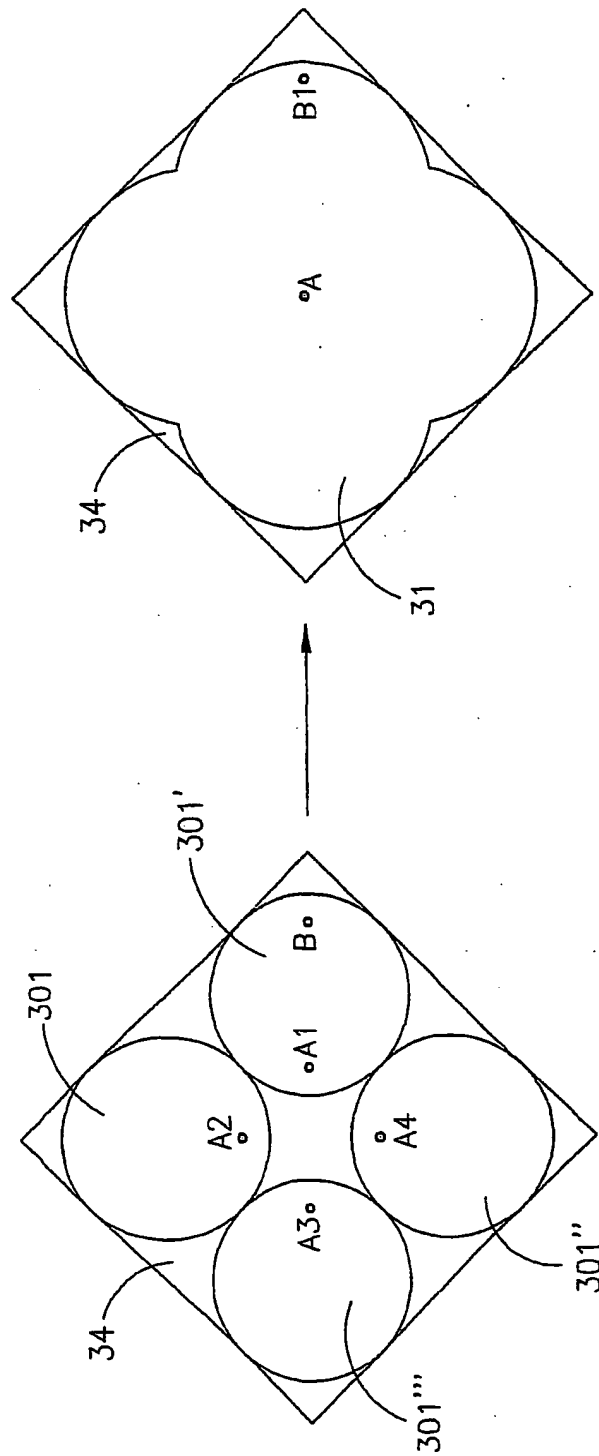


FIG. 3

5/8

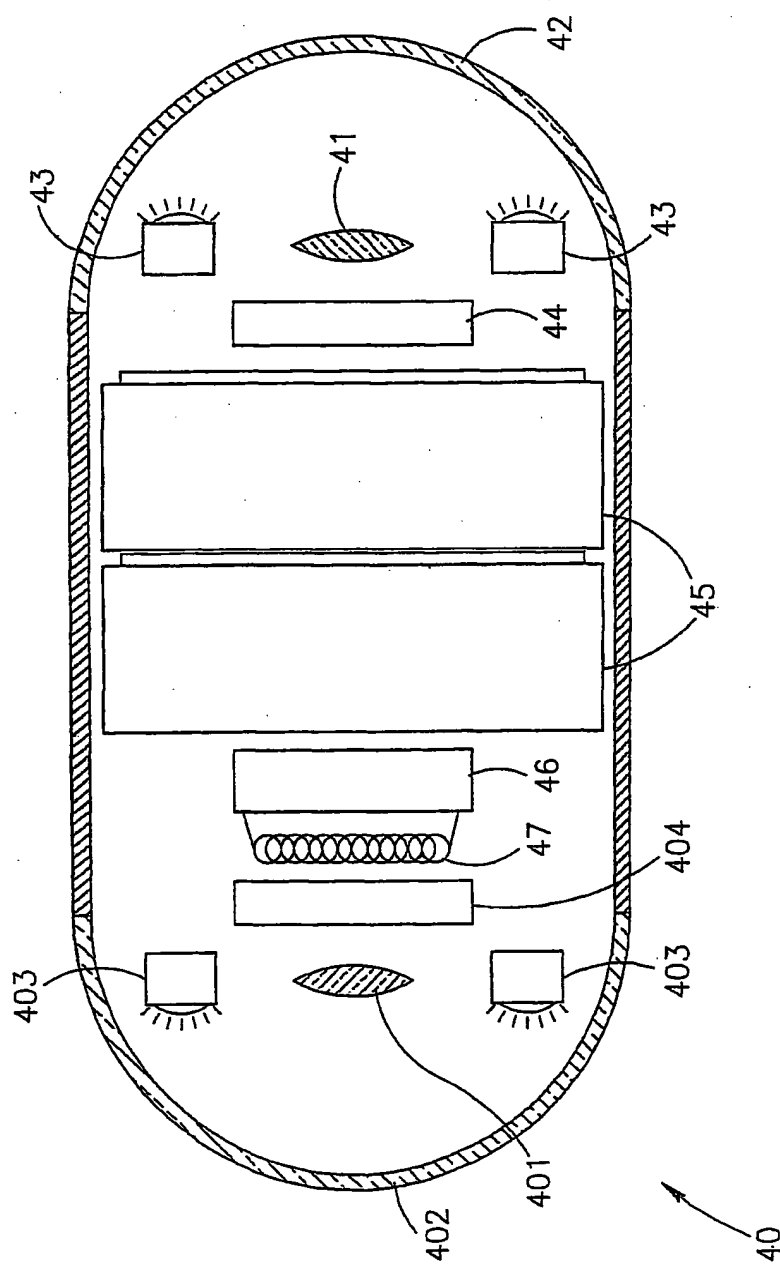


FIG. 4

6/8

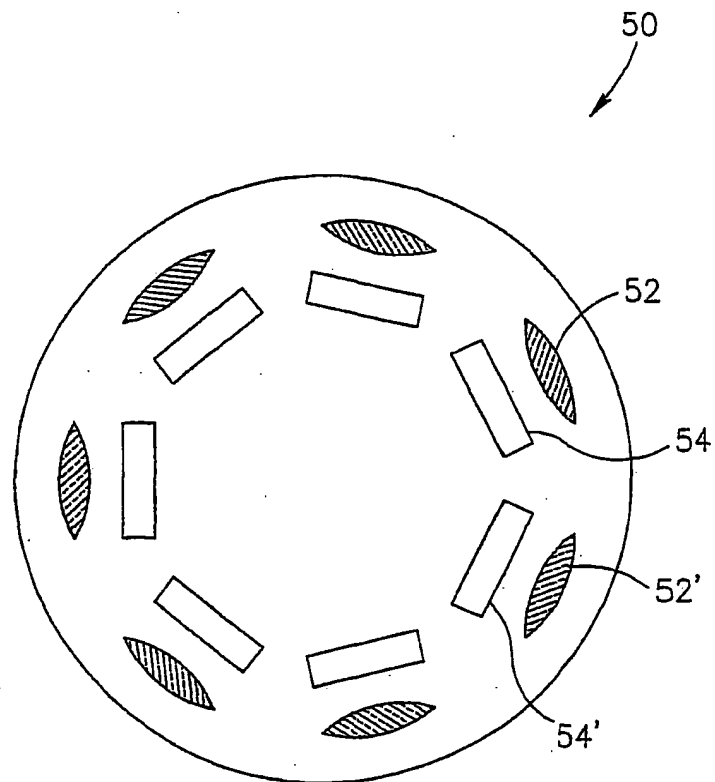


FIG. 5

7/8

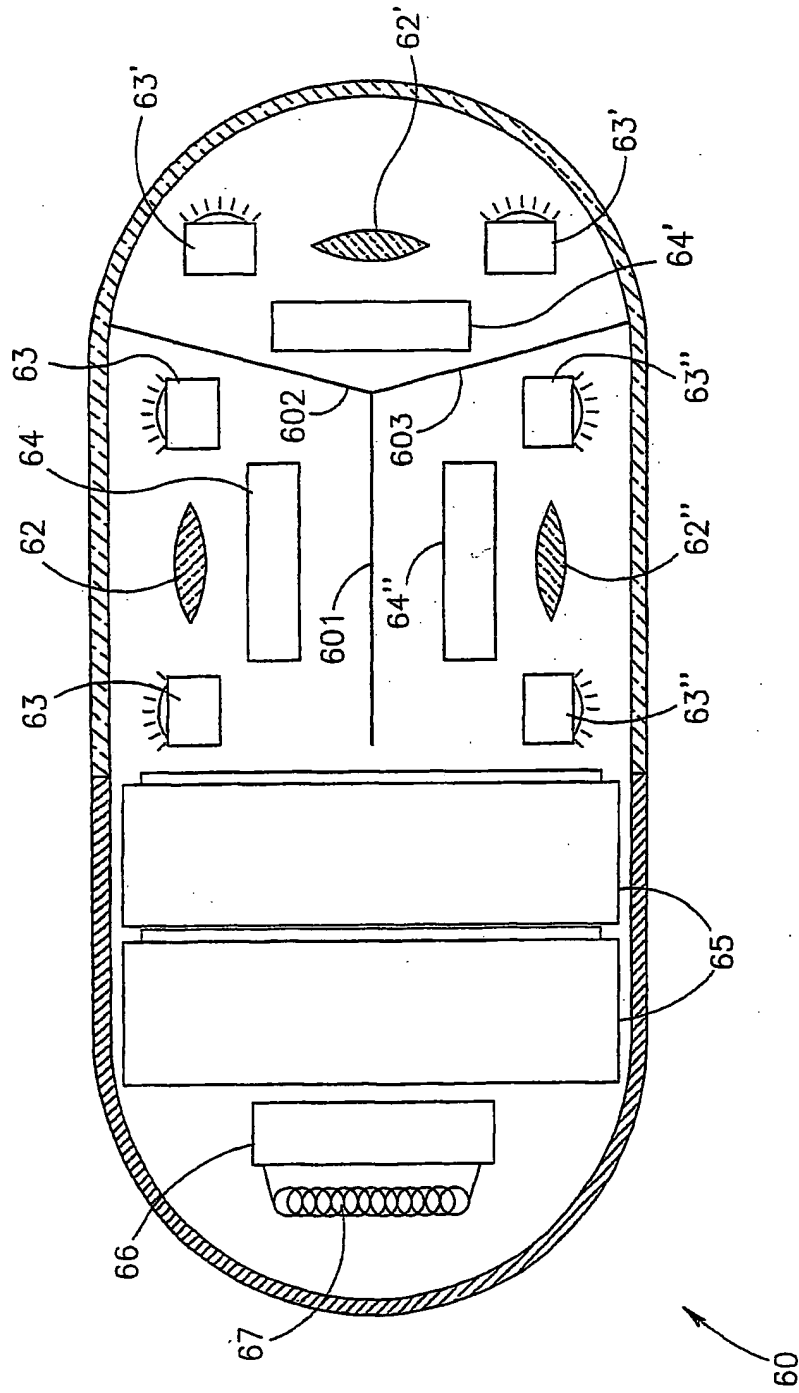


FIG. 6

8/8

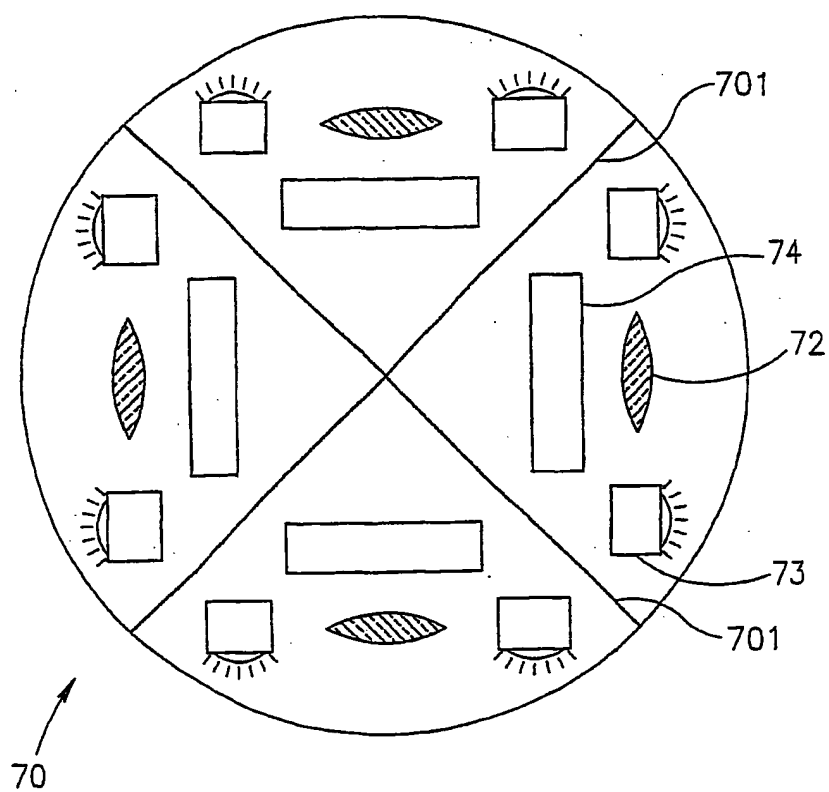


FIG. 7